



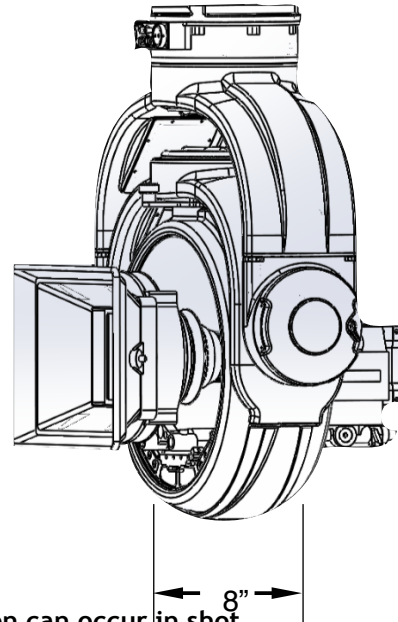

SPECIFICATIONS:

Head Weight	74lbs (33.6kg)
Max Camera Load	100lbs (45kg)
All Axis 360° Continuous	All Axis 360° Continuous
Power	48V Head / 24V Console
Video	HD-SDI BNC Through head
Power Output	15V & 24V
Max Speed	300° /sec

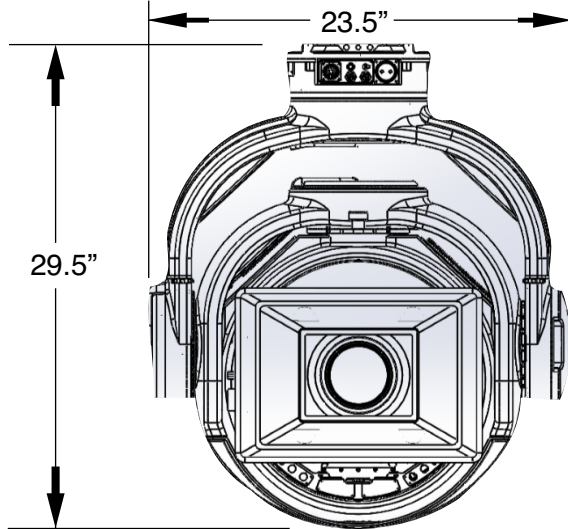

FEATURES

- Overslung, Underslung, cantilevered (matrix) capability. Transition can occur in shot
- Direct Drive Motors and technology provide incomparable stability
- Keeps virtually perfect horizon even under continuous high G forces
- Head can be extended to accommodate longer camera packages while still maintaining full range of movement
- Fully Wireless operation up to 1.5miles
- No need for leveling Head on cranes or to have level rigging plates.
- Controllable via hand wheels, joystick, force joystick, or pan bar
- Operating temp -5° to 122°F (-20° to 50°C)
- Carbon Fiber construction for light weight, rigid performance.
- 4 Operator modes for ultimate control (SpaceCam, SpaceCam 2, Zedir Pan, HardMount)

EMPIRE PRODUCTION SUPPORT
CRANES • JIBS • REMOTES

631-988-0763 • info@epsremotes.com